
DANGER: DISCONNECT ELECTRIC POWER SUPPLY BEFORE SERVICING


SCHEMATIC

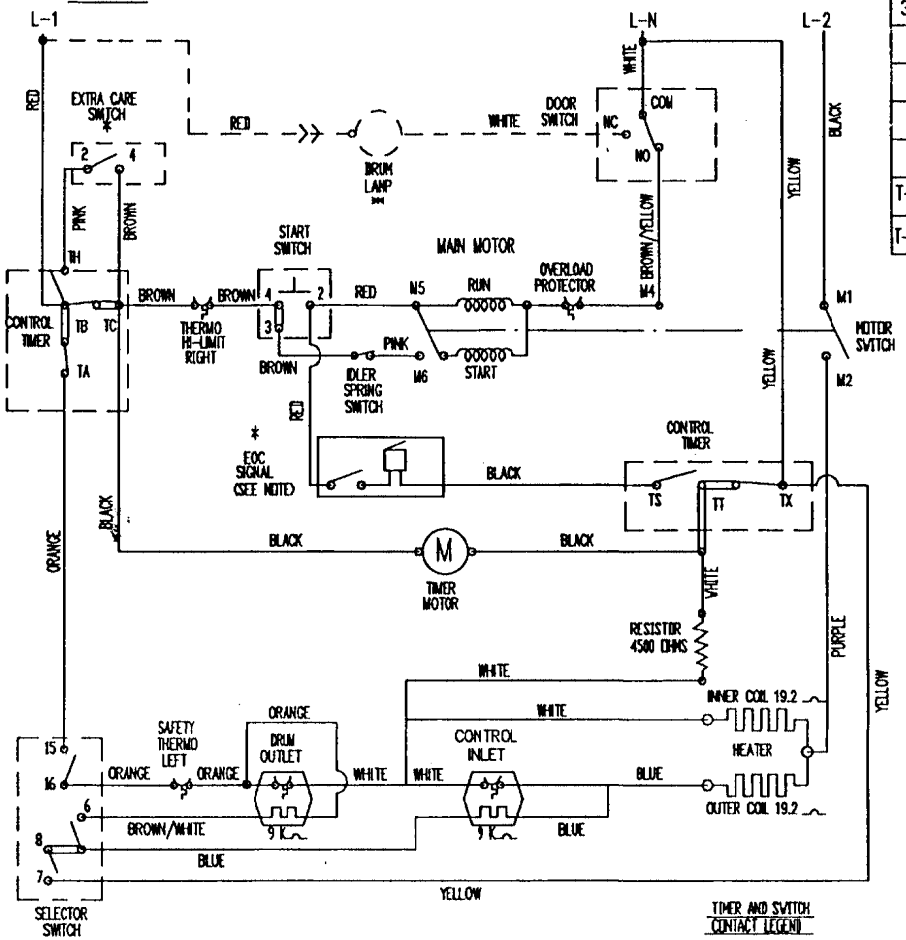


NOTE:
EOC SIGNAL WILL SOUND WHEN TIMER IS IN COOL DOWN PERIOD OF CYCLE AND DURING EXTRA CARE CYCLE. IT OPERATES WITH SIGNAL ON 5 SECONDS AND OFF 78 SECONDS. TO TEST- SET TIMER NEAR END OF CYCLE OR IN EXTRA CARE CYCLE AND WAIT 2 MINUTES FOR SIGNAL TO SOUND. TIMER MUST BE ALLOWED TO RUN, AND ELECTRICALLY ENERGIZE SIGNAL.

TERMINAL LEGEND
T- =TIMER
M- =DRIVE MOTOR
* = NOT ON ALL MODELS


TIMER AND SWITCH CONTACT LEGEND
INTERMITTENT
CLOSED
OPENED
NO AFFECTED
M MOMENTARY

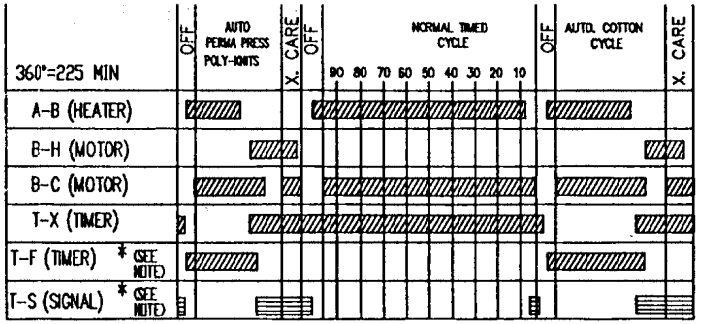

X-CARE CONTROL TIMER CAM CHART

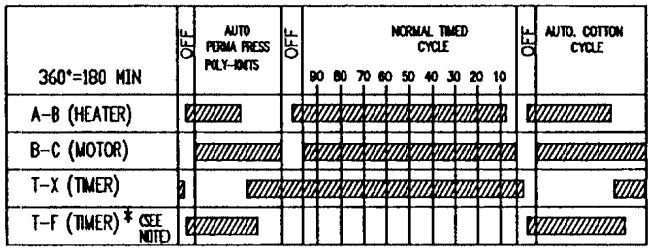

CONTROL TIMER CAM CHART

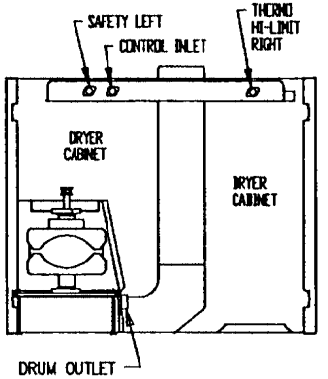

START SWITCH

	CONT.
	4-2
START	M

SELECTOR SWITCH
(ELECT. TYPE)

	CONTACTS 6-8	7-8	15-16
COTTON (HIGH-HEAT)			■
PERMAPRESS-(MED-HEAT)		■	■
DELICATES (LOW-HEAT)	■	■	
FLUFF			

THERMOSTAT	TEMPERATURE °F OPEN	CLOSE	TEMPERATURE °C OPEN	CLOSE
DRUM OUTLET	135 ± 5	125 ± 5	57 ± 3	52 ± 3
BIASED CONTROL INLET	210 ± 5	180 ± 6	99 ± 3	82 ± 3
THERMO HI-LIMIT RIGHT	315 ± 10	250 ± 15	157 ± 6	121 ± 9
SAFETY LEFT	210 ± 5	180 ± 7	99 ± 3	82 ± 4

OPTION SW.

		TERM. 2-4
EXTRA CARE	OFF	
	ON	■

212D1010P016

PUB # 31-16093
REV. 1

P016 P016 P016 P016 P016 P016

Book HL-12 Page
Pub# 31-16093
Dwg# 212D1010P016