

## REMOVING THE TUB RING

<b>⚠ WARNING</b>

<b>Electrical Shock Hazard</b> Disconnect power before servicing. Replace all parts and panels before operating. Failure to do so can result in death or electrical shock.

1. Unplug washer or disconnect power
2. Raise the top on the hinges. See the section: "REMOVING THE TOP".
3. To release the tub ring from the tub; first, press back and down on the top of the tub ring to reduce pressure on the keyed locking tab, then release the tab, see figure 1.

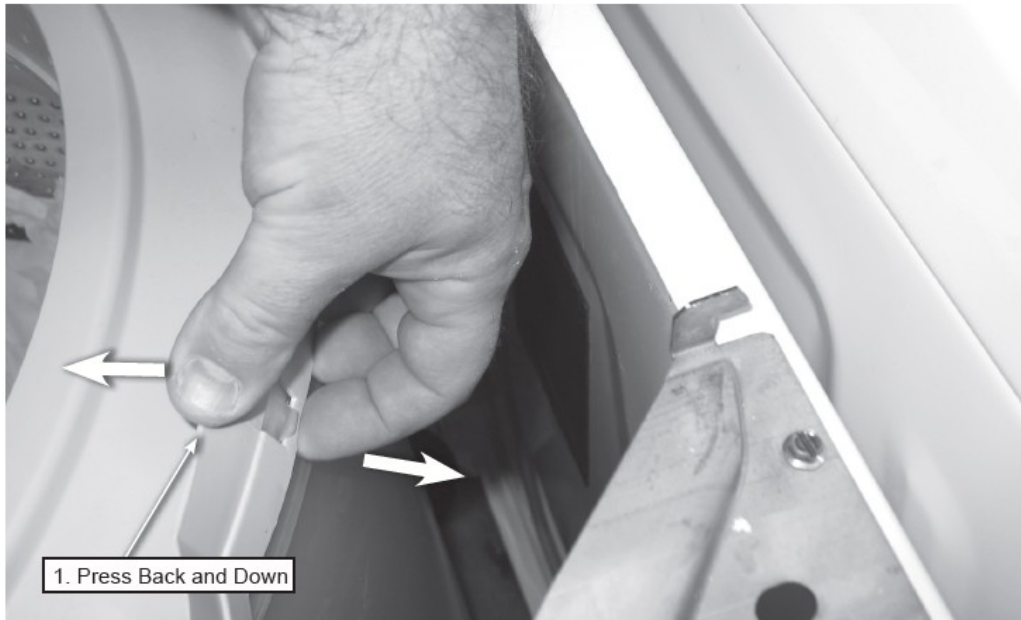


Figure 1