



COLOR	COLOR SYMBOL	COULEUR
RED	RD	ROUGE
BLACK	BK	NOIR
YELLOW	YL	JAUNE
WHITE	WH	BLANC
BLUE	BU	BLEU
VIOLET	VT	VIOLET
BROWN	BR	MARRON
GREEN	GN	VERT
BLUE/WHITE	BU/WH	BLEU/BLANC
ORANGE	OR	ORANGE

FLEXIBLE METAL CONDUIT, 125°C WIRES

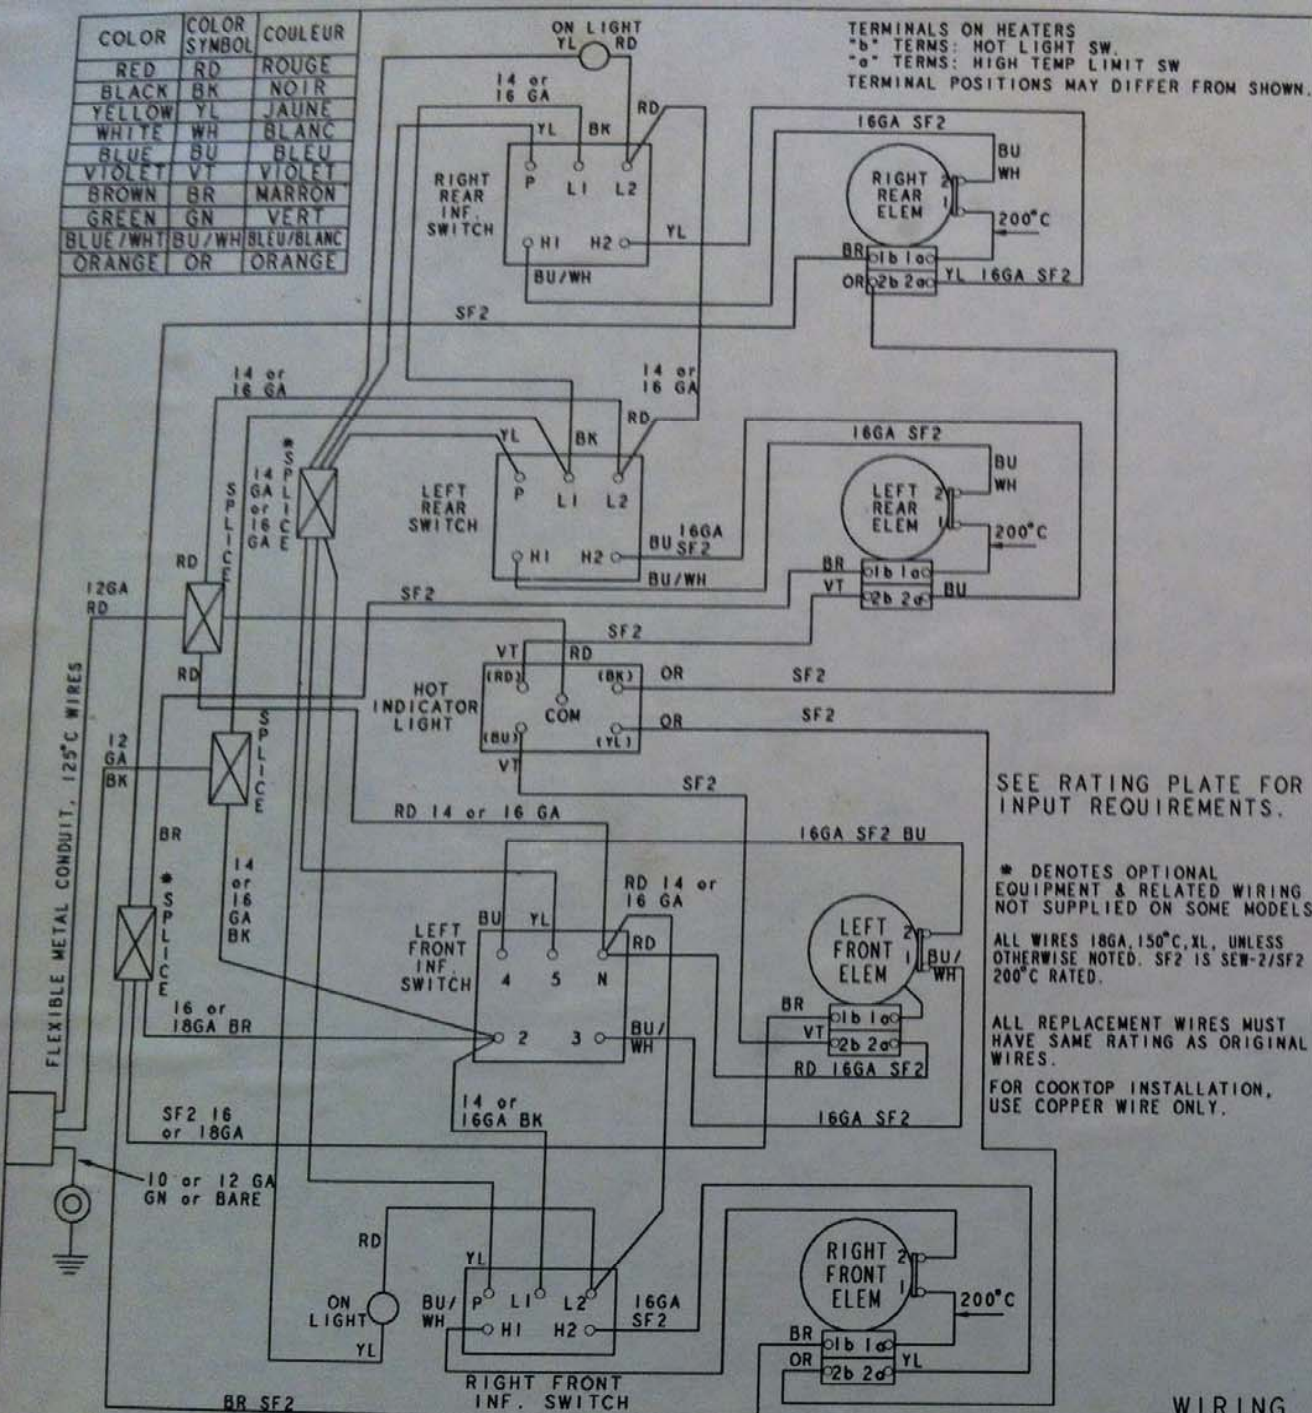

WIRING
DIAGRAM

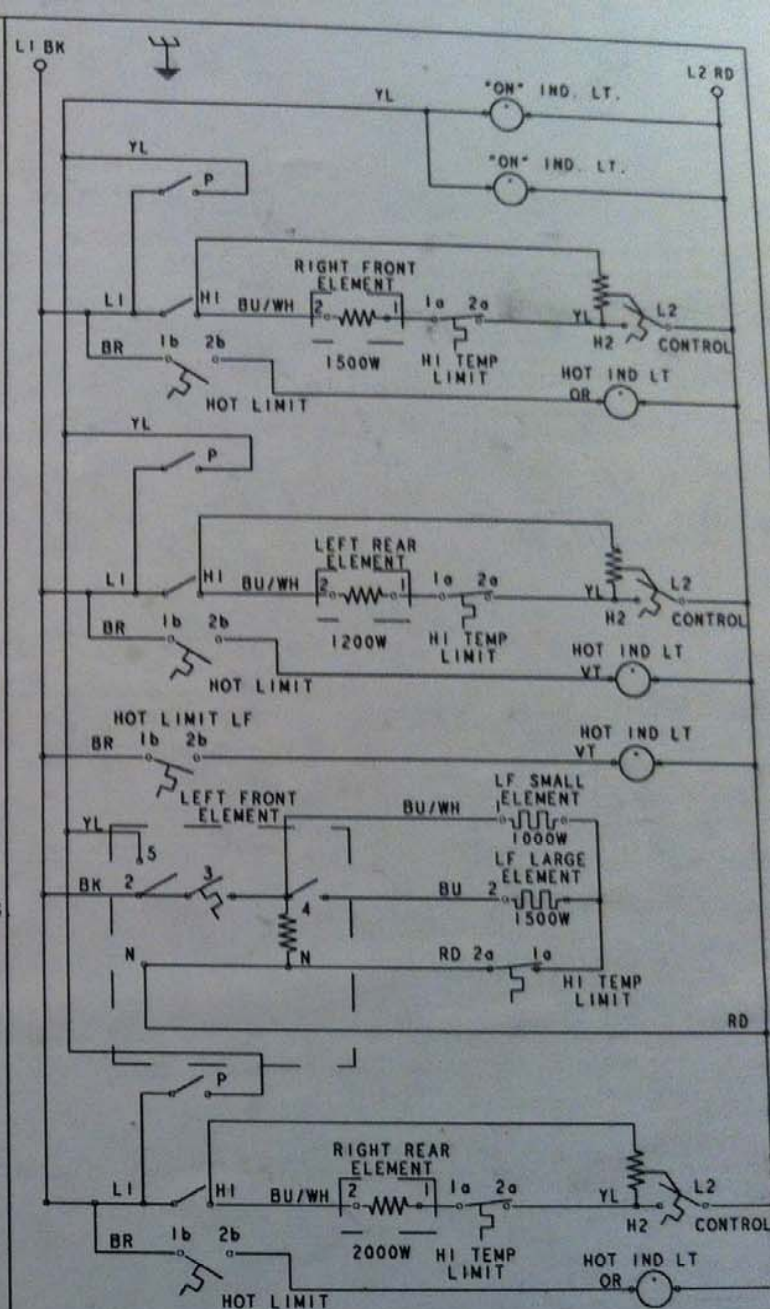

WIRING SCHEMATIC

35-31968301-0

NOTE:
ELEMENT WATTAGES MAY VARY. REPLACEMENT
ELEMENTS MUST HAVE SAME WATTAGE
RATING AS ORIGINAL ELEMENTS.

* DUAL ELEMENT SWITCH CONDITIONS

	3-4	2-3	2-5
OFF	OFF	OFF	OFF
SMALL OFF	CYCLE	CYCLE	CYCLE
LARGE ON	CYCLE	CYCLE	CYCLE

* EXCEPT AT HIGH POSITION, SWITCH IS

WARNING - ELECTRICAL SHOCK HAZARD
 FUSE OR DISCONNECT POWER AT MAIN
 SERVICING. FAILURE TO DO SO
 COULD RESULT IN SERIOUS INJURY
 OR DEATH.

DANGER - RISQUE DE CHOC ELECTRIQUE
 - DEBRANCHER L'ALIMENTATION
 ELECTRIQUE. AVANT D'ENTREPRENDRE CETTE
 UNITE. LE MANQUE DE RESPECT DE CETTE
 CONSIGNE POURRAIT AVOIR COMME RESULTAT
 UNE BLESSURE GRAVE OU MORTELLE.